



LASER 2000



ILEE® MOZIL

CHARACTERISTICS

- Solid built for industrial use
- Compact housing
- Beam shape: dot or line
- Accurate alignment of the optical to the mechanical axis
- Can be factory-focused to required working distance on customer request
- AR coated glass lens
- Low power consumption

APPLICATIONS

- Measurement
- Pointing
- Alignment
- Positioning




LASER 2000

TECHNICAL DATA

Wave-length nm	Optical output mW	Beam shape	Laser class ¹⁾	Divergence ²⁾ mrad	Wavelength shift ³⁾ nm/°C	Output power stability ³⁾ % 25°C	Ripple noise 4–6VDC rms	Order number
● 635	<1	Dot	2	<0.5	0.25	<0.5	<1%	0009-10-92-01
● 635	<1	Line ⁴⁾	2	<0.5	0.25	<0.5	<1%	0009-11-92-01
● 635	~3	Dot	3R	<0.5	0.25	<0.5	<1%	0009-12-92-01
● 635	~3	Line ⁴⁾	3R	<0.5	0.25	<0.5	<1%	0009-13-92-01
● 515	<1	Dot	2	<0.5	0.25	<0.5	<1%	0009-07-92-01
● 515	<1	Line ⁴⁾	2	<0.5	0.25	<0.5	<1%	0009-08-92-01

¹⁾ EN/ISO 60825-1 ²⁾ E@FWHM ³⁾ after warmup ⁴⁾ ~100mm line length @ 100mm distance

DIMENSIONS

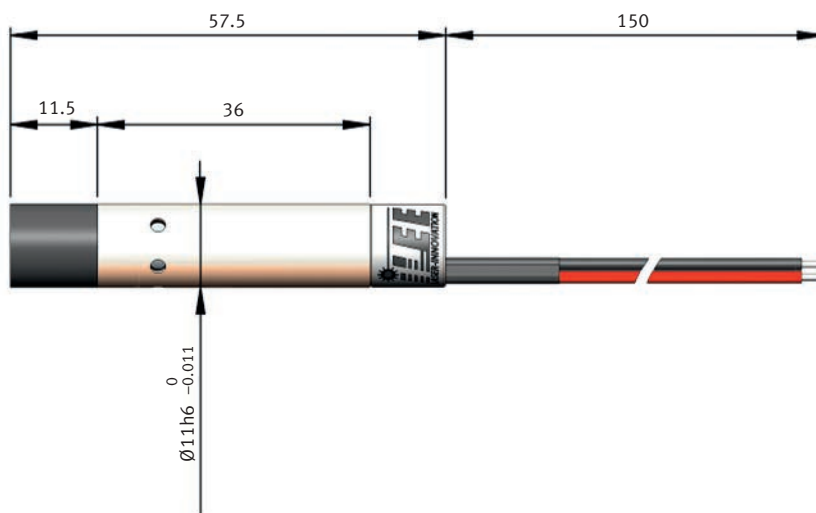

ELECTRICAL CONNECTIONS

VCC: Red (+) Operating voltage: 4–6VDC
GND: Black (–) Polarity on housing: –



Laser beams can cause damage to your eyes.
The user is responsible to observe the local safety regulations.



Mistakes and technical changes reserved.

D-A-CH

Laser 2000 GmbH
82234 Wessling
Tel. +49 8153 405-0
info@laser2000.de
www.laser2000.de

FRANCE

Laser 2000 SAS
33600 Pessac
Tel. +33 5 57 10 92 80
info@laser2000.fr
www.laser2000.fr

IBERIA

Laser 2000 SAS
28034 Madrid
Tel. +34 617 308 236
info@laser2000.es
www.laser2000.es

NORDICS

Laser 2000 GmbH
11251 Stockholm
Tel. +46 8 555 36 235
info@laser2000.se
www.laser2000.se