



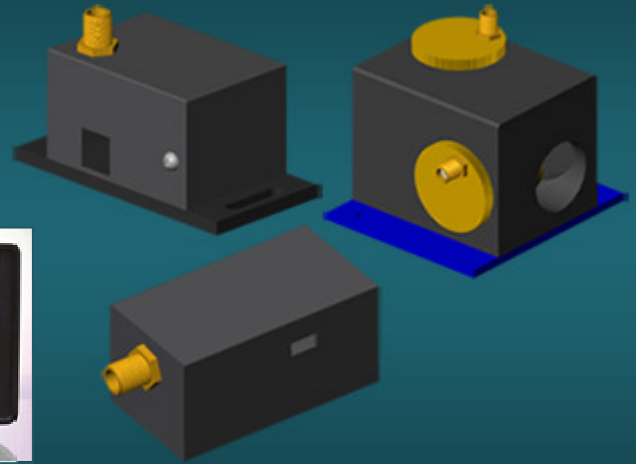

LASER 2000

Acousto-Optic Deflectors

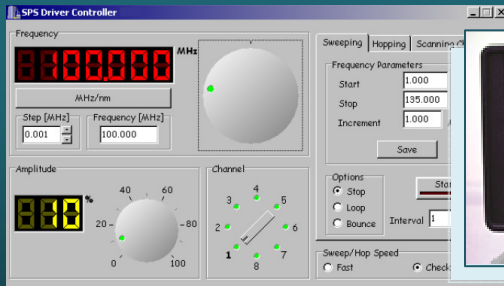

Brimrose offers a large variety of variable frequency **RF drivers** compatible with our deflectors. The most commonly used are VCO (Voltage Controlled Oscillator) type and computer-controlled direct digital synthesizers. By altering the RF drive frequency to the AOD, the deflection angle is varied.



The AOD changes the diffraction angle of an input laser beam and its angular position is linearly proportional to the RF frequency, so that the higher the frequency, the larger the diffracted angle. The deflector is provided with an auxiliary RF driver, and can be customized according to user requirements.

D-A-CH

Laser 2000 GmbH
82234 Wessling
Tel. +49 8153 405-0
info@laser2000.de
www.laser2000.de

FRANCE – Telecom

Laser 2000 SAS
78860 St-N. I. Bretèche
Tel. +33 1 30 80 00 60
info@laser2000.fr
www.laser2000.fr

FRANCE – Photonic

Laser 2000 SAS
33600 Pessac
Tel. +33 5 57 10 92 80
info@laser2000.fr
www.laser2000.fr

IBERIA

Laser 2000 SAS
28034 Madrid
Tel. +34 617 308 236
info@laser2000.es
www.laser2000.es

NORDICS

Laser 2000 GmbH
112 51 Stockholm
Tel. +46 8 555 36 235
info@laser2000.se
www.laser2000.se

Acousto-Optic Deflector (AOD) Specifications

Model #	Wavelength Range (nm)	Active Aperture (mm)	Time-Bandwidth Product	3dB Bandwidth (MHz)	Deflection Angle (deg.)	Diffraction Efficiency (%)
TED-130-60	380-1600	1.0 x 4.2	60	60	0.44	70
TED-200-100	380-1600	1.0 x 4.2	100	100	0.8	70
TED-320-200	380-1600	0.5 x 9.0	400	200	1.69	60
TED-400-200	380-1600	0.5 x 5.0	200	200	1.69	50
TED10-100-60-.488	488	3.0 x 7.0	600	60	2.5	>75
TED20-100-60-.488	488	3.0 x 14.0	1200	60	2.5	>70
TED10-100-50-.532	532	3.0 x 7.0	500	50	3.0	>70
TED20-100-50-.532	532	3.0 x 14.0	1000	50	3.0	>70
TED10-75-50-.633	633	3.0 x 7.0	500	50	3.0	>75
TED20-75-50-.633	633	3.0 x 14.0	1000	50	3.0	>70
TED10-60-40-.800	800	3.0 x 7.0	400	40	2.0	>70
TED20-60-40-.800	800	3.0 x 14.0	800	40	2.0	>65
TED10-50-30-1.06	1060	3.0 x 7.0	300	30	2.7	>75
TED20-50-30-1.06	1060	3.0 x 14.0	600	30	2.7	>70
GPD-250-100	633	0.75 x 5.0	70	100	0.57	70
GPD2-250-100	633	0.75 x 13.0	200	100	0.57	40
GPD-350-200	633	0.75 x 5.0	140	200	1.15	40
GPD2-350-200	633	0.75 x 13.0	400	200	1.15	35
GPD-650-300	633	0.18 x 5.0	210	300	2.25	40
GPD-800-400-SC	600-1600	0.18 x 4.2	400	400	4.3	30
GPD2-800-400-SC	600-1600	0.18 x 8.4	800	400	4.3	25
GPD-800-500	600-1600	0.076 x 5.0	350	500	2.9	50
GPD-1500-1000	600-1600	0.075 x 6.3	250	1000	5.7	15-20
LND-2500-1000	630/830	0.075 x 3.4	1000	1000	10 @630nm	10-15
IPD-200-50	1000-2100	0.75 x 6.0	50	50	0.65	40
IPD-400-150	1000-2100	0.75 x 6.0	150	150	1.95	35
IPD-600-200	1000-2100	0.18 x 6.0	200	200	2.6	30
2DS-100-45-532 *	532+/-25	10.0 x 10.0	675 x 675	45	2.3	>40

* 2-Dimensional AO Deflector is also available in the 400nm to 1600nm optical range.

The AOD models shown above represent some examples of our fabrication capabilities. In addition, other frequencies or configurations are available, as well.

D-A-CH

Laser 2000 GmbH
82234 Wessling
Tel. +49 8153 405-0
info@laser2000.de
www.laser2000.de

FRANCE – Telecom

Laser 2000 SAS
78860 St-N. I. Bretèche
Tel. +33 1 30 80 00 60
info@laser2000.fr
www.laser2000.fr

FRANCE – Photonic

Laser 2000 SAS
33600 Pessac
Tel. +33 5 57 10 92 80
info@laser2000.fr
www.laser2000.fr

IBERIA

Laser 2000 SAS
28034 Madrid
Tel. +34 617 308 236
info@laser2000.es
www.laser2000.es

NORDICS

Laser 2000 GmbH
112 51 Stockholm
Tel. +46 8 555 36 235
info@laser2000.se
www.laser2000.se

Variable Frequency Driver Specifications

Driver Model #	VFB-XX-YY-V-A-F2	VFE-XX-YY-V-B1-F2/2Ch
Frequency Range	Corresponding to the AO Device Requirements	Matching the 2-D AOD controlled by application of external tuning voltage
Tuning Voltage	0 - 10 V analog (-2 to +20 VDC no damage)	
Frequency Accuracy	1% nominal after 15 minute warm-up, constant temperature	
Scanning Speed	50 micro sec from min to max frequency with step change in tuning voltage	
Output Power	Power is optimized for peak efficiency with supplied AO device.	
Modulation Type	Analog Amplitude or TTL Compatible (optional)	Analog Amplitude; DC-10 MHz independent for each channel
Modulation Input	50 Ω ; 0-1 V or 330 Ω ; 0-5 V	50 Ω ; 0-1 V
Operating Power	90-240 VAC $\pm$ 25% 50-60 Hz	
Enclosure	The unit will be packaged in a 190 mm (7.5 inch) wide by 90 mm (4 inch) high by 220 mm (8.75 inch) deep instrument case. The rear panel heat sink increases the depth to 240 mm (9.75 inches) maximum. The size is exclusive of connectors. A detachable AC line cord is provided.	
Environmental	Nominal Laboratory Conditions: The maximum temperature is +35° C. The unit is not sealed against moisture or condensing humidity.	

In addition to the standard product shown, customer configurations are available for specialized applications.

If there are any questions please contact Brimrose at office@brimrose.com.

D-A-CH

Laser 2000 GmbH
82234 Wessling
Tel. +49 8153 405-0
info@laser2000.de
www.laser2000.de

FRANCE – Telecom

Laser 2000 SAS
78860 St-N. I. Bretèche
Tel. +33 1 30 80 00 60
info@laser2000.fr
www.laser2000.fr

FRANCE – Photonic

Laser 2000 SAS
FR-33600 Pessac
Tel. +33 5 57 10 92 80
info@laser2000.fr
www.laser2000.fr

IBERIA

Laser 2000 SAS
28034 Madrid
Tel. +34 650 529 806
info@laser2000.es
www.laser2000.es

NORDICS

Laser 2000 GmbH
112 51 Stockholm
Tel. +46 8 555 36 235
info@laser2000.se
www.laser2000.se